


# S500L 圓鋸片快速倒角機

## QUICK SAWBLADE CHAMFERING MACHINE

Up & down two pcs of diamond grinding wheel chamfering at the same time.  
Quick chamfering which can cooperate to 5~6 sets of saw blade sharpening machine.  
This is the best machine for grinding company to save labor and reduce the cost.


上下兩片鑽石砂輪，同步倒角。本機操作簡單。倒角快速，可配合5~6部鋸片研磨機作業，是研磨業者節省人力降低成本的最佳利器。

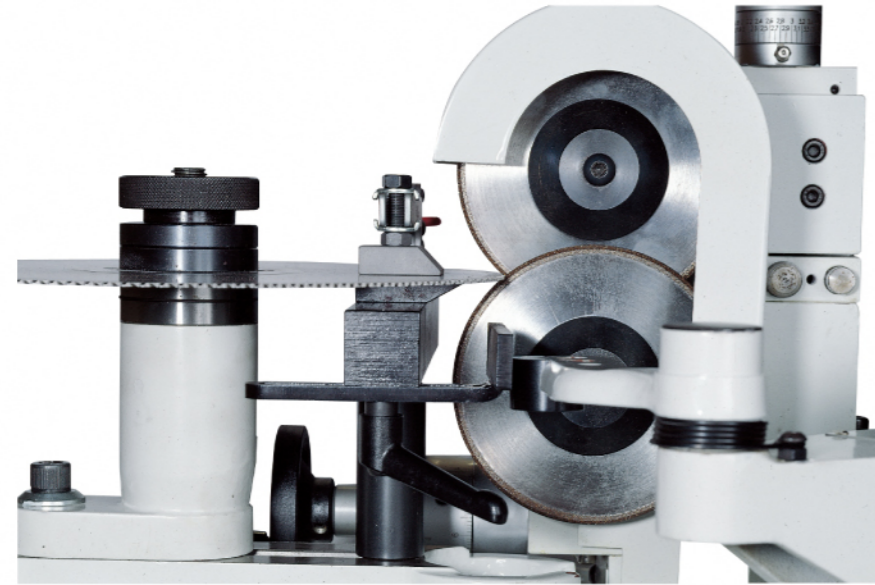

S500L  
Grinding Wheel Thickness Adjusting Scale  
砂輪厚度調整刻度



### Chamfering Examples 倒角加工例

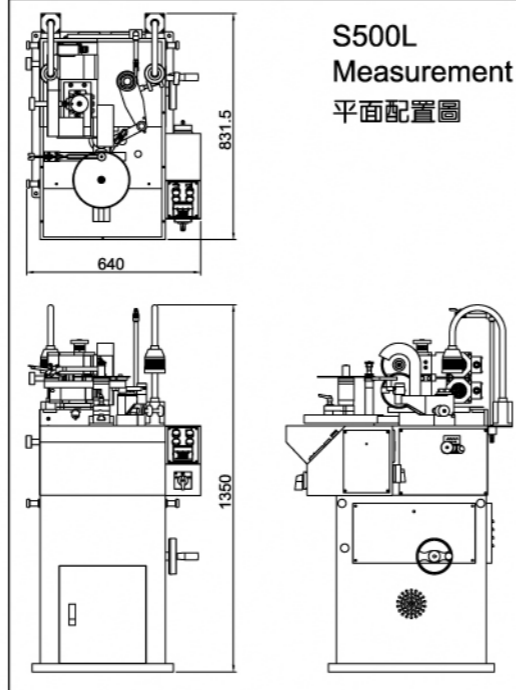

### Standard Accessories 標準配件

Tool Box 工具箱	1set 套
Instruction Manual 說明書	1copy 份
Diamond Grinding Wheel 鑽石砂輪	2pcs 片

### Specifications 規格表

Grinding Range 研磨範圍	65~500 mm
Number of Teeth 鋸片齒數	沒有限制
Saw Blade Thickness 鋸片厚度	8 mm Under 以下
Chamfering Speed 倒角速度	60~240 teeth/min 齒/分鐘
Grinding Wheel Speed 砂輪轉速	6800 rpm
Package Size 裝箱尺寸	112 x 87 x 150 cm
Net Weight/Gross Weight 淨重/毛重	290 / 350 kg

※ All designs, spec. and characteristics shown as above is subject to any change without further notice.  
因設計或製造上的必要，如有變更恕不另行通知。



### Precision Stroke 精密行程


- The X-axis is used by European high precision linear sliding rail and motor, providing accuracy operation, maximum stability and anti-wear.  
X軸採用歐洲進口高精度線性滑軌及馬達。  
加工精準，高穩定性，耐磨耗。

### MAIN PARTS 主要零件

- Use SKD11 high carbonaceous steel, with processes of heat treatment and grinding.  
採用SKD11高碳鋼，並經熱處理、研磨。

### EASY TO ADJUST 調整簡易

- Outstanding design, easy operation.  
獨特設計，操作更方便。
- Stepless grinding speed, adjustable according to teeth pitch.  
研磨速度為無段變速，可隨齒距調整。
- Equipped by a cooling system device to prevent sawblade from burning out, increase durability and sharpness of diamond grinding wheel.  
加裝冷卻切削液裝置使鋸片不易燒焦，增加鑽石砂輪的壽命及鋒利度。

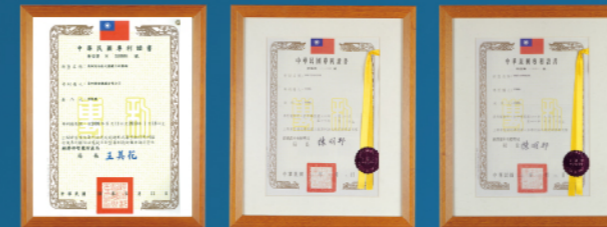

Patent certificates of Sawblade Chamfering Machine  
圓鋸片研磨機專利證書

